

## CROPLANDS PART NUMBERS: B264.612.171 – BRAGLIA DOUBLE SWIVEL ¼" MALE



264.612.167  
264.612.170




264.612.168  
264.612.173



264.612.171



264.612.172

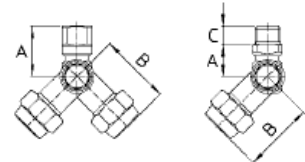

### Standard completi di ghiera G3/8 - Ugello non compreso

Pressione di esercizio max.: 20 bar

Peso: Singolo 67 g - Doppio 87 g

**Materiali:** ottone nichelato - acciaio inox - NBR - PA66 modificato all'urto

**Impiego:** in agricoltura per spruzzare insetticidi, fungicidi ed erbicidi. Impieghi industriali. Portaugelli orientabili in un arco di 270°. Le tenute con O Ring evitano la fuoriuscita del liquido durante il posizionamento del portaugello. I dadi bloccano la posizione scelta.

### Standard with 3/8" BSP caps - Spray tip not included



Max. operating pressure.: 20 bar / 300 psi

Weight: Single 67 g / 2.3 oz - Double 87 g / 3 oz


**Materials:** nickel plated brass - stainless steel - Buna N - Shock resistance PA66


**Use:** for insecticides, fungicides and weed control. Industrial uses. Adjustable up to 270°. O Ring seals for drip proof adjustment. Two nuts to fix desired position.

## COME SI ORDINA / HOW TO ORDER

CODICE code	VERSIONE model	ATTACCO connection	A mm	B mm	C mm	
264.612.167	Doppio - Double	1/4"NPTF	26	36	-	
264.612.168	Singolo - Single	1/4"NPTF	26	36	-	
264.612.170	Doppio - Double	Ø12x 19F	26	36	-	
264.612.171	Doppio - Double	G1/4M. - 1/4"BSPM.	16	36	10	
264.612.172	Singolo - Single	G1/4M. - 1/4"BSPM.	16	36	10	
264.612.173	Singolo - Single	Ø12x 19F	26	36	-	

# 264.612.167

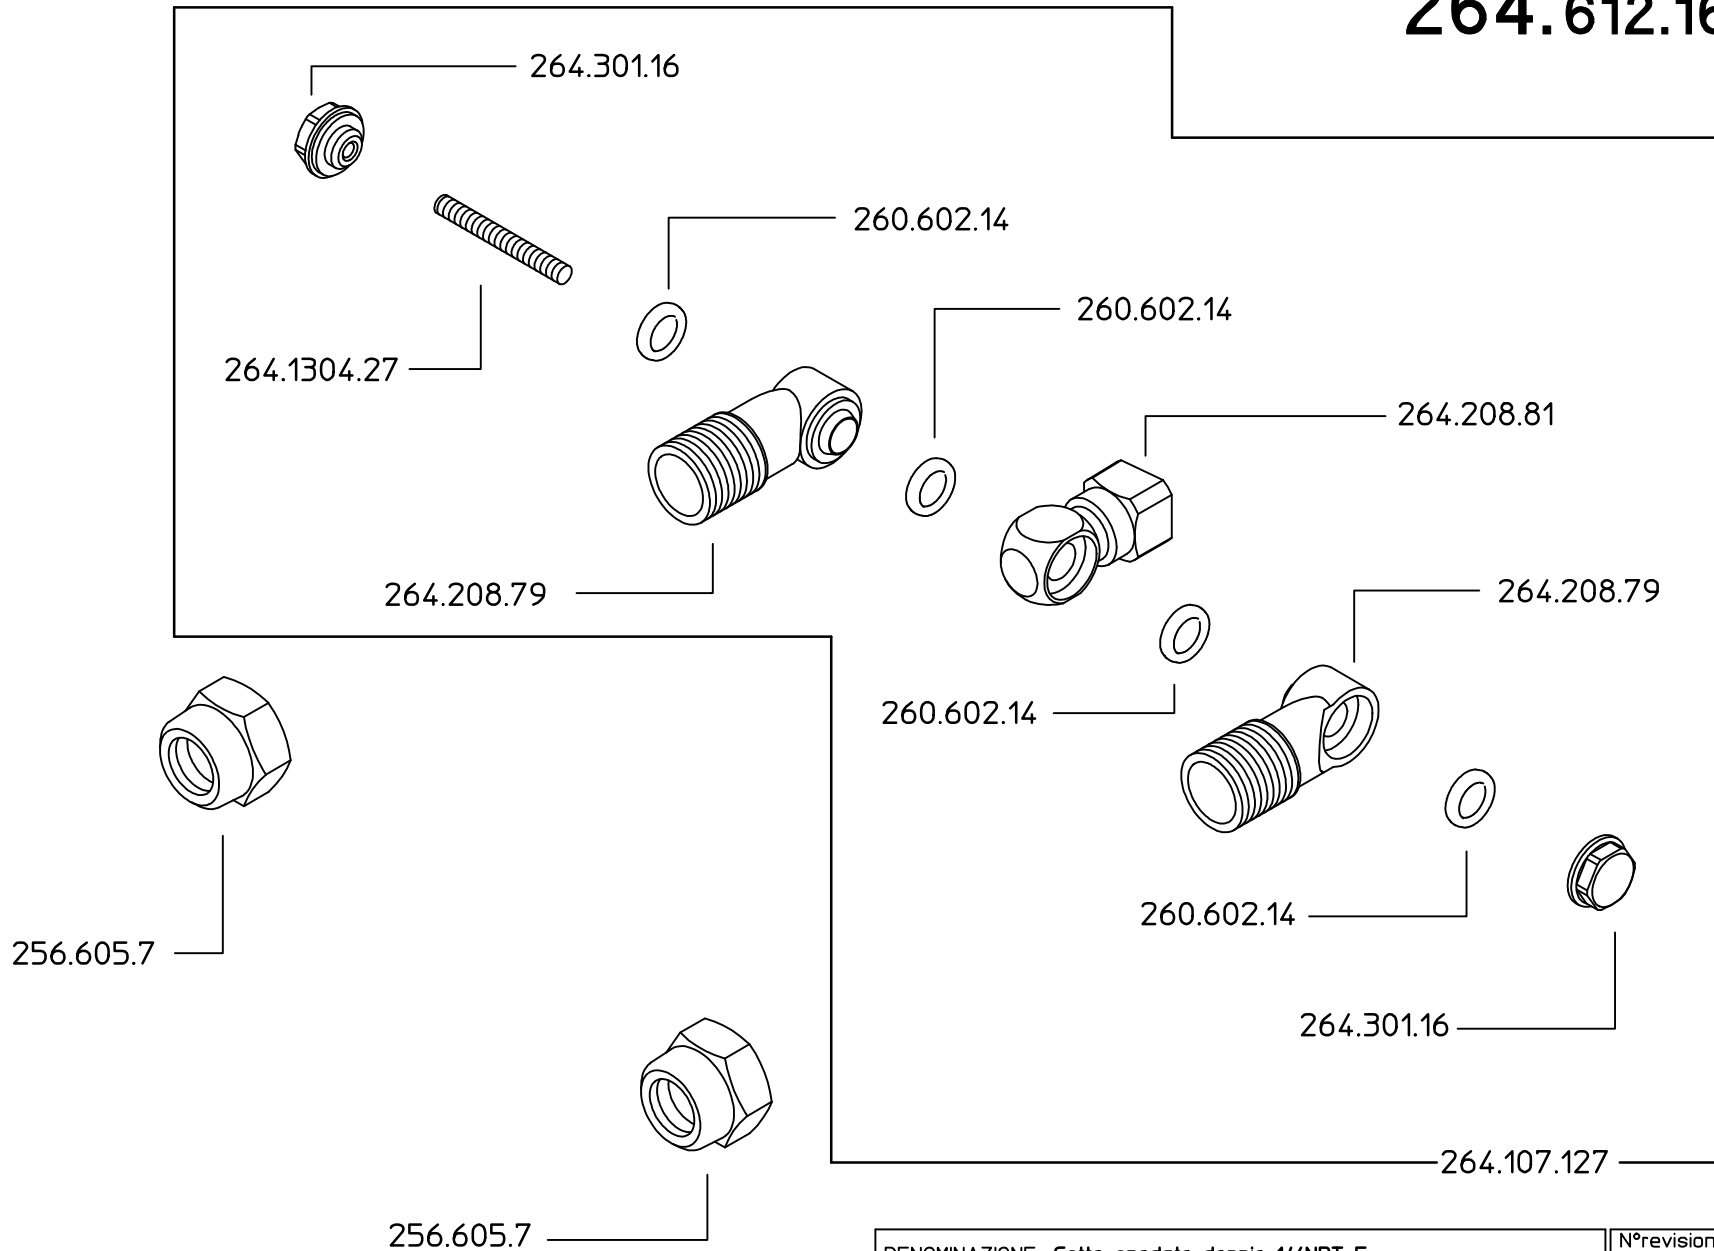

DENOMINAZIONE: <b>Getto snodato doppio 1/4NPT F.</b>			N°revisione <b>01</b>	Data revisione: <b>14/10/05</b>
 <b>Braglia SRL</b>	Tel. ++39 0522 340648 Fax. ++39 0522 345025 Email <a href="mailto:braglia@braglia.it">braglia@braglia.it</a>	STE	RTE	Dis.N°/Codice <b>264.612.167</b>
I-42029 Masone (REGGIO EMILIA)-ITALY-UE				