


PIN	DESIGNATION	COLOUR
A	SECT 1	WHT
B	SECT 2	ORG/BLU
C	SECT 3	BLU/YEL
D	SECT 4	PNK
E	BLANK	N/A
F	12 +VE 4mm	RED
G	12 -VE	BLK
H	BLANK	N/A
J	DUMP A	BLU/BLK
K	DUMP B	BLK/RED

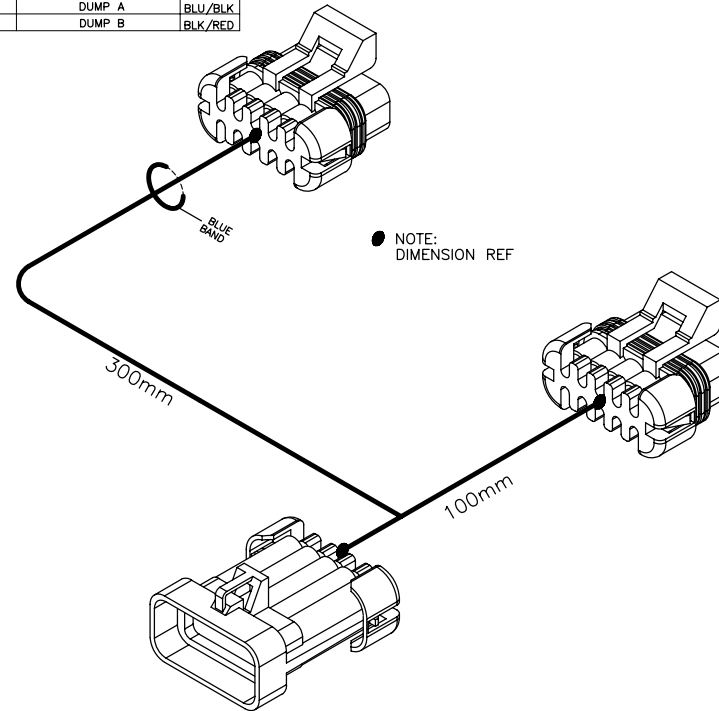


PIN	DESIGNATION	COLOUR
A	SECT 1	WHT
B	SECT 2	ORG/BLU
C	SECT 3	BLU/YEL
D	SECT 4	PNK
E	BLANK	N/A
F	12 +VE 4mm	RED
G	12 -VE	BLK
H	DUMP A	BLU/BLK
J	FLOW 12+ve	GRN/BRN
K	DUMP B	BLK/RED

PIN	DESIGNATION	COLOUR
A	SECT 1	WHT
B	SECT 2	ORG/BLU
C	SECT 3	BLU/YEL
D	SECT 4	PNK
E	BLANK	N/A
F	12 +VE 4mm	RED
G	12 -VE	BLK
H	DUMP	N/A
J	FLOW 12+ve	GRN/BRN
K	BLANK	N/A

NOTE:

DUMP A & DUMP B WIRES MAY NEED TO BE REVERSED FOR CORRECT DUMP VALVE OPERATION

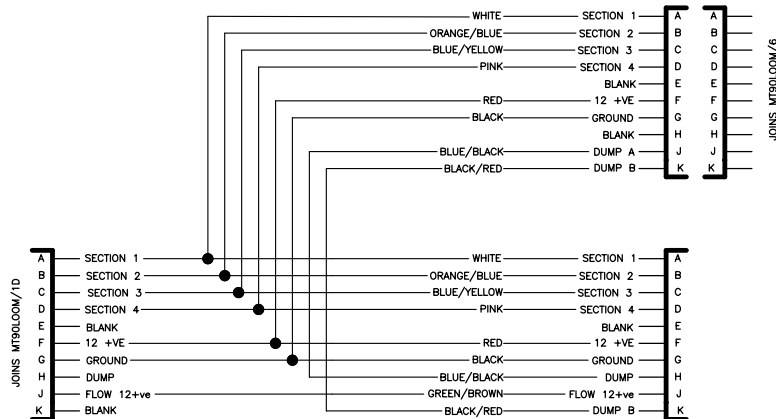

MT90LOOM/1C4TGS2
ADAPTOR LOOM FOR GS2 HORT
SPRAYER VALVE LOOM

